



Intermec

Product Profile

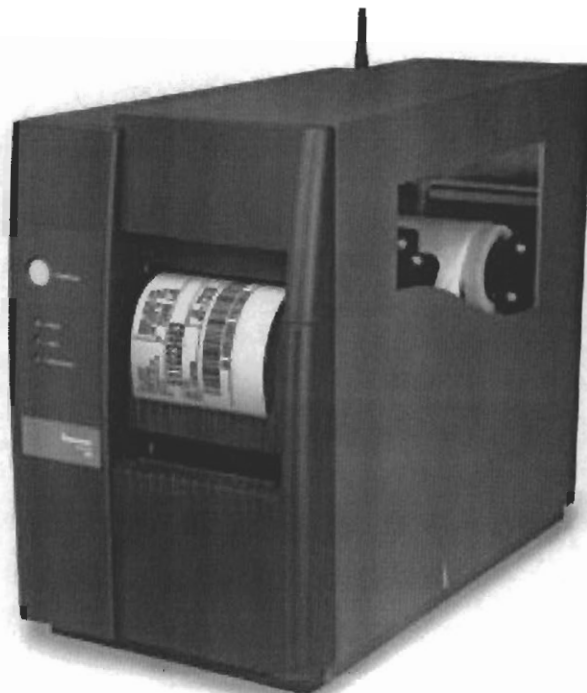

EasyCoder® 4420 PRINTER

- Field-proven industrial strength
- Rugged metal frame and enclosure
- Supports unlimited duty cycle printing
- Versatile connectivity includes choice of Serial, Parallel, Twinax/Coax, EasyLAN™ Ethernet and EasyLAN™ Wireless
- Supports IEEE 802.1x security
- Online Verifier option
- Internal full roll batch take-up option
- Free LabelShop® label design and print software

The EasyCoder 4420 is a high capacity industrial strength printer with extremely fast throughput. Labels start printing immediately upon selecting the print button at speeds up to 10 inches per second. The design allows for a full 8" diameter roll of media and 450 m (18,000") ribbon to maximize operator productivity. When equipped with the optional internal self-strip and full roll batch take-up the 4420 can print and rewind a full 8" diameter roll of media.

The 4420 offers a full range of connectivity choices. Standard interfaces include high speed RS-232 and bi-directional parallel with Twinax/Coax, EasyLAN Ethernet, and EasyLAN Wireless available as options. The networking options allow for network management without the complexity, space requirements, and vulnerability of external print servers. A heavy-duty cutter with tray option is also available.


The EasyLAN Wireless interface uses an integrated 802.11b radio. This radio provides 128 bit WEP, TTLS, LEAP, and

WPA encryption of the information relayed through the network. Intermec's wired and wireless technology ensures secure printing and network infrastructure for all environments.

Intermec's online verifier option helps to eliminate non-compliance labeling fines or product labeling errors. The verifier can check up to 48 picket fence and one ladder style barcode per label.

The Intermec Printer Network Manager (IPNM), LabelShop® START design and print software, and InterDriver™ Windows printer driver are included, free of charge, with every printer.

The EasyCoder 4420 printer is built to last in harsh, industrial environments. The robust performance, fast throughput, and rugged steel construction make it an ideal label, ticket, and tag printer for manufacturing, distribution and warehouse environments.

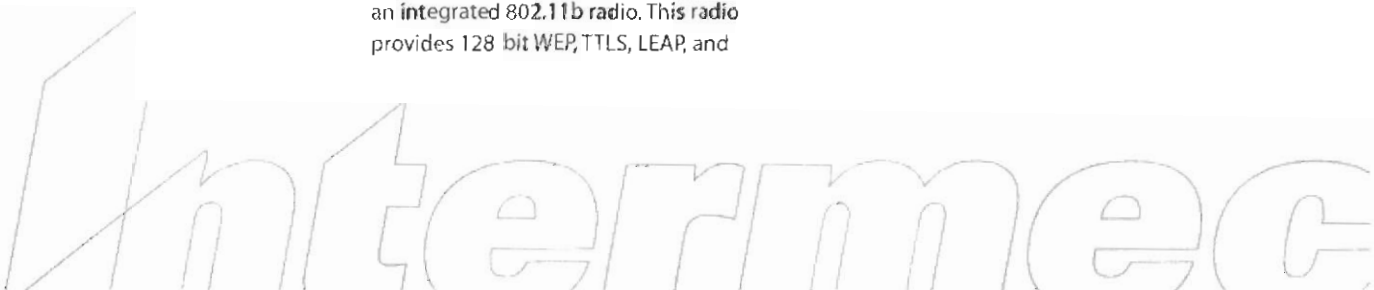

***Application**

Direct Thermal and Thermal Transfer printer for self-adhesive label, ticket and tag applications.

Model

EasyCoder 4420

Physical Characteristics

Length: 43.82 cm (17.25 in)
Height: 41.91 cm (16.5 in)
Width: 24.8 cm (9.75 in)
Weight: 19.35 kg (43 lbs.)

Print Specifications

Maximum Width: 112 mm (4.4 in)
Maximum Length: Unlimited
Element: 0.125 mm (0.00492 in)

Print Speed

Selectable Print Speeds: 50.8 mm/s (2 ips) to 254 mm/s (10 ips)

Print Resolution

8 dots/mm (203 dots per inch)

Media Specifications

Style: Roll-feed, die-cut, continuous or fanfold labels, tags, or tickets
Type: Plain paper thermal transfer or thermal sensitive papers
Maximum Liner Width: 114 mm (4.5 in)
Minimum Liner Width: 19 mm (.75 in)
Maximum Media Length: 610 mm (24 in)
Minimum Media Length: 12.7 mm (0.5 in)
Thickness: .08 mm to .3 mm (.003 to .012 in)
Supply Roll Capacity: 152.4 m (6,000 in linear)

Ribbon Specifications

Type: Wax, wax/resin, resin
Standard Width: 5.38 cm (2.12 in), 7.62 cm (3.0 in), 10.41 cm (4.1 in), 11.43 cm (4.5 in)
Length: 457 m (18,000 in)

Interface**Standard:**

- RS-232 Serial
- IEEE 1284 Parallel

Optional:

- **Internal IBM Twinax or Coax**
- **Internal EasyLAN™ Ethernet 100/10BaseT**
- **EasyLAN Wireless, internal 802.11b Wireless Ethernet**

EasyLAN Ethernet Supported Protocols:

TCP/IP-suite (TCP, UDP, ICMP, IGMP, etc.), LPR/LPD, FTP, BOOTP, DHCP, HTTP, SNMP, SMTP. SNMP-MIB II supported (over UDP/IP), private enterprise MIB included

EasyLAN Wireless

- **Fully integrated IEEE 802.11b**
- **WEP 128 bit, TTLS, LEAP, and WPA**
- **Supports IEEE 802.1x security**
- **Multiple industrial antenna options for maximized coverage**

Software**Available printer command languages:**

- IPL

Applications/Drivers (comes on Printer Companion CD) including:

- **InterDriver™ Windows printer driver**
- **Intermec LabelShop® START label design and print package**
- **Intermec Printer Network Manager (IPNM) for administration of network connected printers**
- **PrintSet for printer configuration**

Barcode Symbologies

1-Dimensional: Code 2 of 5, Codabar, Code 11, Code 39, Code 93, Code 128, HIBC, Interleaved 2 of 5, Postnet, UPC/EAN, JIS-IFT
2-Dimensional: Code One, Code 16K, Code 49, DataMatrix, PDF417, QR Code, Micro PDF, MaxiCode

Standards Supported

UPC/EAN Shipping Container; UCC/EAN 128 Serial Shipping Container; MH10.8 Shipping Label; AIAG (shipping parts label); LOGMARS; POSTNET; ISBT 128; GM1724

Character Sets

- **Unicode, all single byte codepage, all double byte codepage**
- **Code page 850, French, German, ISO 256 character, Italian, Kanji/Katakana (optional), Norwegian/Danish, Spanish, Swedish/Finnish, Swiss, UK, ASCII, USA ASCII**

Fonts and Graphics

21 resident **bitmapped** fonts (includes OCR-A and OCR-B), 3 resident **outline** fonts, supports user-defined fonts and graphics, supports True Type fonts.

Power Supply

Voltage range: 100, 115, 230 VAC
Frequency range: 50 to 60 Hz

Environment

Operating Temperature: 4° to 40° C (40° to 104° F)
Storage Temperature: -20° to 70° C (-4° to 158° F)
Humidity: 10 to 90% (non condensing)
Ventilation: Free air

Regulatory Approvals

Complies with all FCC Part 15, Class A; CISPR 22 Class A; ICES-003 Class A; UL-US & Canada & TÜV GS agency approved; CE, NOM, & C-TIC

Options

Internal EasyLAN™ Ethernet; EasyLAN™ Wireless; Twinax and Coax; Internal Self-strip; Full Roll Batch Take-up; Cutter / Tray; DRAM image expansion 8 MB; Flash storage expansion 16 MB; Kanji/Katakana Fonts; SV100 Online Verifier Kit

Intermec®
 expect MORE®

North America
 Corporate Headquarters
 6001 36th Avenue West
 Everett, Washington 98203
 tel: 425.348.2600
 fax: 425.355.9551

Systems & Solutions
 550 2nd Street S.E.
 Cedar Rapids, Iowa 52401
 tel: 319.369.3100
 fax: 319.369.3453

Media Supplies
 9290 Le Saint Drive
 Fairfield, Ohio 45014
 tel: 513.874.5882
 fax: 513.874.8487

Canada
 7065 Tranmere Drive
 Mississauga, Ontario
 L5S 1M2 Canada
 tel: 905.673.9333
 fax: 905.673.3974

**Europe/
 Middle East & Africa**
 Headquarters
 Sovereign House
 Vastern Road
 Reading RG1 8BT
 United Kingdom
 tel: 44.118.987.9400
 fax: 44.118.987.9401

Asia
 Asia Regional Office
 26-16 International Plaza
 10 Anson Road
 Singapore 079903
 tel: 65.6324.8391
 fax: 65.6324.8393

Beijing Representative Office
 29 FL, Unit A1, China Merchant Tower
 118 Jian Guo Road
 Chaoyang District, Beijing 100022
 Tel: 86 10.5165.5922
 Fax: 86 10.6567.6778

Australia
 Level 7, 200 Pacific Highway
 Crows Nest, NSW 2065
 Australia
 tel: 61.2.9492.4400
 fax: 61.2.9954.6300

South America & Mexico
 Intermec South America Ltda.
 Rua Samuel Morse 120 9 andar
 Brooklin CEP04576-060
 São Paulo, SP
 Brazil
 tel: 55.11.5502.6770

Intermec Technologies de Mexico
 Av Tamaulipas #141, Primer Piso
 Col. Hipodromo Condesa
 Mexico, DF, 06140 Mexico
 tel: 525.55.211.1919
 fax: 525.55.211.8121

Internet
www.intermec.com

Sales
 800.347.2636
 (toll free in N.A.)
 tel: 425.348.2726

Service and Support
 800.755.5505
 (toll free in N.A.)
 tel: 425.356.1799

Copyright © 2004 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 608371-01F 12/04

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.